


# Powder Binder Spreader

**alpha** 10 BT  
12 BT

With conveyor belt  
Semi-trailed, 1 axle

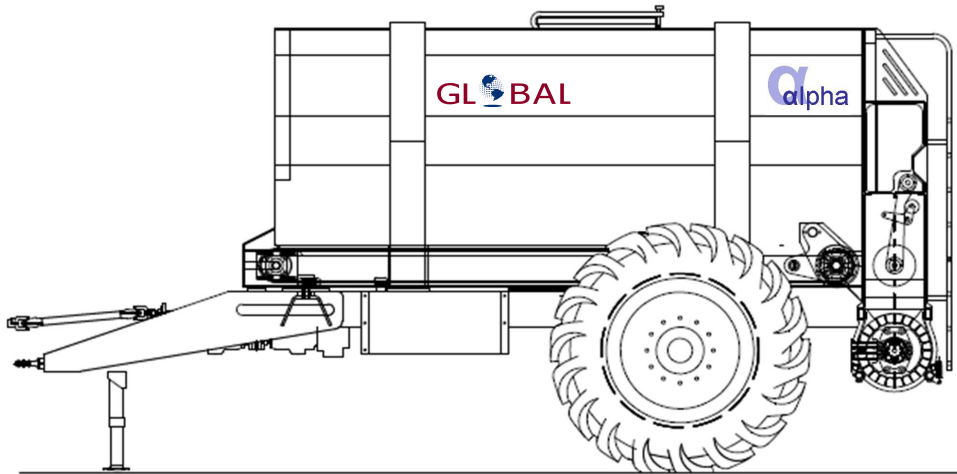

Modern concept, offering following features

- Binder transfer by means of a conveyor belt, width 1 m
- Product delivery rate in proportion to the drive speed
- Adjustable product delivery rate from 3 to 60 kg/m<sup>2</sup>, depending on the drive speed
- Spreading by means of stainless steel cellular rotor, diameter 520 mm
- Rotor of 4 separate sections, each with independent drive and operation
- Access to spreading compartment
- Computer management in Can-Bus configuration, mounted inside anti-choc box with monochrome 3,8" display
- Fast and watertight high-quality electric connexions
- Moulded plugs
- Predisposition for filter cartridges for venting during filling procedure
- Very limited dust dispersion
- Spring mounted trailer boom with hydraulic support leg
- Hydraulic pumps driven by tractor PTO
- Manhole
- Homokinetic transmission 1" 3/8 – 6 grooves
- Hydraulic braking system
- Tyres  $\alpha$ 10 VT: 540/80 R 38 -  $\alpha$ 12 VT: 650/75 R 32

Capacity  
 $\alpha$  10 BT: **10 m<sup>3</sup>**  
 $\alpha$  12 BT: **12 m<sup>3</sup>**

Spreading Width  
 $\alpha$  10 BT: **2.200 mm**  
 $\alpha$  12 BT: **2.400 mm**

Total Width  
**2.775 mm**

Height  
 $\alpha$  10 BT: **2.900 mm**  
 $\alpha$  12 BT: **2.950 mm**

Length  
**6.450 mm**

## OPTIONS

*Complete filtering device including air compressor*

*Air compressor*

*Sprinkling system with water tank and pump*

*Integrated weighing system*

*Printer*