


Powder Binder Spreader

α alpha 15 VT
17 VT

With conveyor screws
Semi-trailed, 2 axles

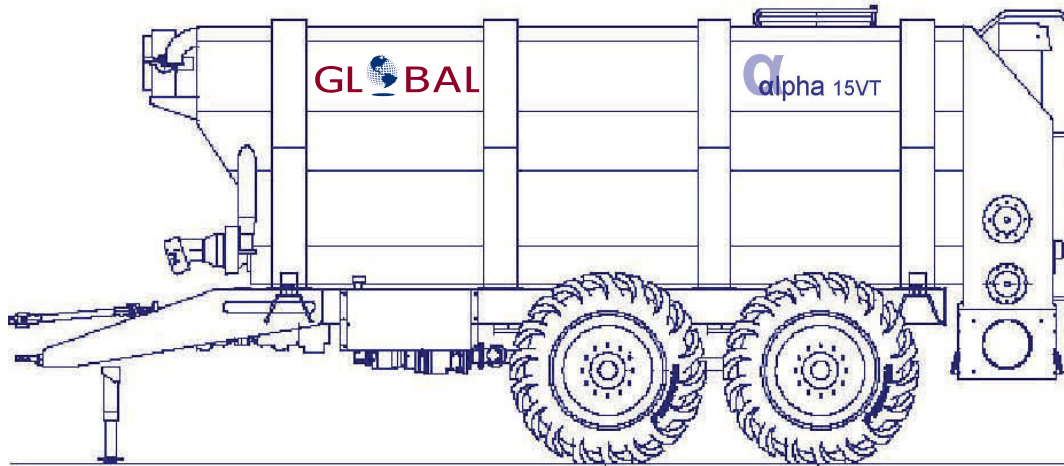

Modern concept, offering following features

- Binder transfer by means of 2 horizontal conveyor screws
- Hydraulically driven conveyor screws
- Product delivery rate in proportion to the drive speed
- Adjustable product delivery rate from 3 to 60 kg/m², depending on the drive speed
- Spreading by means of stainless steel cellular rotor, diameter 520 mm
- Rotor of 4 separate sections, each with independent drive and operation
- Access to spreading compartment
- Computer management in Can-Bus configuration, mounted inside anti-choc box with monochrome 3,8" display
- Fast and watertight high-quality electric connexions
- 2 hydrostatic drive axles
- Predisposition for filter cartridges for venting during filling procedure
- Very limited dust dispersion
- Spring mounted trailer boom with hydraulic support leg
- Hydraulic pumps driven by tractor PTO
- Manhole
- Homokinetic transmission 1" 3/8 – 6 grooves
- Hydraulic braking system
- Tyres α15 VT: 650/60 R 26,5 - α17 VT: 800/45 x 30,5

Capacity
α 15 VT: **15 m³**
α 17 VT: **17 m³**

Spreading width
2.400 mm

Total width
α 15 VT: **2.725 mm**
α 17 VT: **2.950 mm**

Height
α 15 VT: **3.000 mm**
α 17 VT: **3.350 mm**

Length
α 15 VT: **6.500 mm**
α 17 VT: **7.500 mm**

OPTIONS

Complete filtering device including air compressor

Hydrostatic drive axles and hydraulic coupling

Air compressor

Sprinkling system with water tank and pump

Integrated weighing system

Printer

All specs are subject to change without notice or obligation

ALPHA15 17VT04.09 - E